




# FDS010-12M6


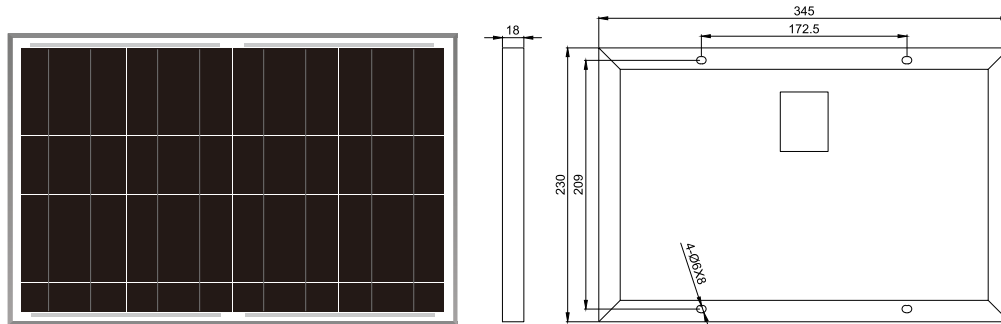


**25**  
YEARS

**OUTPUT POWER WARRANTY**

**10**  
YEARS

**PRODUCT WARRANTY**

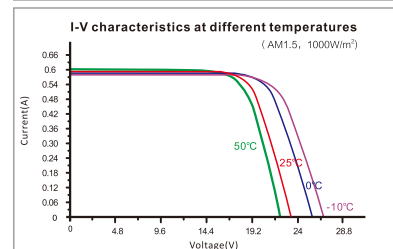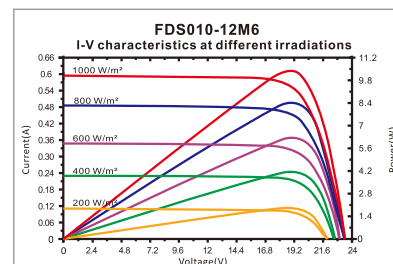

## ELECTRICAL DATA (STC)

Model Number	FDS010-12M6
Rated Power in Watts-Pmax(Wp)	10
Open Circuit Voltage-Voc(V)	22.6
Short Circuit Current-Isc(A)	0.58
Maximum Power Voltage-Vmpp(V)	18.6
Maximum Power Current-Impp (A)	0.54
Module Efficiency (%)	12.6
Minimum Power Tolerance	0~+3%

STC: Irradiance 1000 W/m<sup>2</sup>, Cell Temperature 25°C, Air Mass AM1.5 according to EN 60904-3.

## MECHANICAL DATA

Solar cells	Mono-crystalline 76.5x19.5mm
Cell configuration	36 cells(4×9)
Module dimensions	230×345×18mm
Weight	0.8kg
Superstrate	3.2 mm, High Transmission, Low Iron, Tempered ARC Glass
Substrate	White Back-sheet
Frame	Anodized Aluminium Alloy type 6063T5, Silver color
J-Box	IP65
Cables	—

## TEMPERATURE & MAXIMUM RATINGS

Nominal Module Operating Temperature(NMOT)	45°C ± 2°C
Temperature Coefficient of Voc	-0.29%/°C
Temperature Coefficient of Isc	0.05%/°C
Temperature Coefficient of Pmax	-0.39%/°C
Operational Temperature	-40°C~+85°C
Maximum System Voltage	1000VDC
Max Series Fuse Rating	6A
Limiting Reverse Current	6A

## PACKAGING CONFIGURATION

	40ft	20ft
Number of modules per container	31680	14400
Number of modules per pallet	1440	1440
Number of pallets per container	20	20

Jiangsu Fortunes Solar Technology Co.,Ltd

TEL: +86-512-58542102 58546915 58546916 FAX: +86-512-58542707 P.C.: 215600  
 http://www.fortunes-solar.com / www.fortunes-solar.com.cn E-mail: sales@fortunes-solar.com.cn